



FRONT VIEW

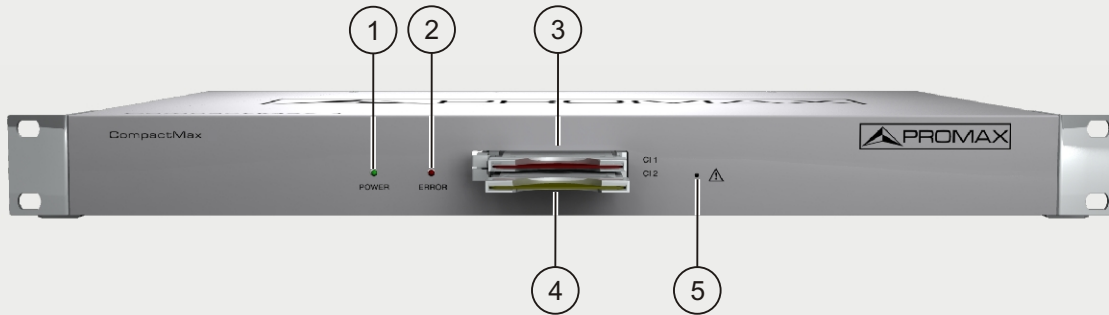


REAR VIEW

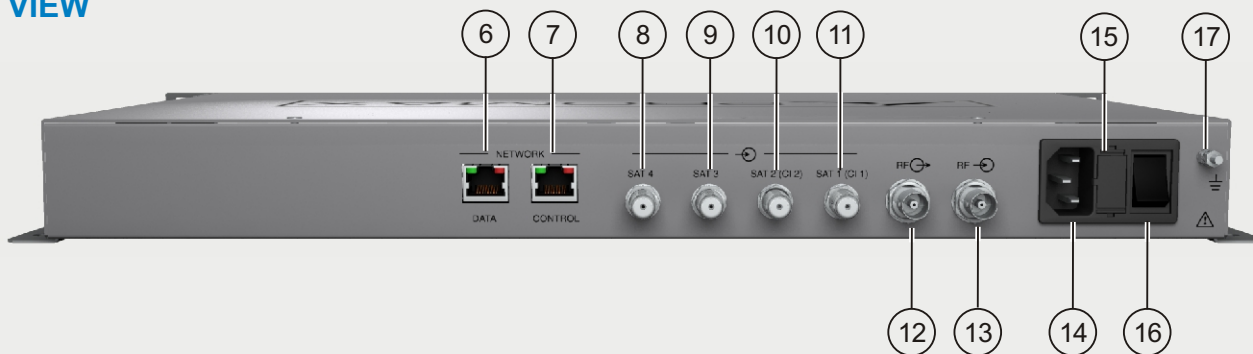

- | | |
|--|---|
| <ul style="list-style-type: none"> ① Power On indicator. ② Error indicator. ③ Common Interface input (CI#1) for decoder card. ④ Common Interface input (CI#2) for decoder card. ⑤ IP address reset. ⑥ Ethernet connection for data network. ⑦ Ethernet connection for equipment control (IP by default: 192.168.29.30; user: Admin; password: Admin). ⑧ Input #4 for satellite signal (DVB-S/S2) free channels. ⑨ Input #3 for satellite signal (DVB-S/S2) free channels. | <ul style="list-style-type: none"> ⑩ Input #2 for satellite signal (DVB-S/S2) scrambled channels (connected to CI#2). ⑪ Input #1 for satellite signal (DVB-S/S2) scrambled channels (connected to CI#1). ⑫ Output for terrestrial RF signal (DVB-T). ⑬ Input for terrestrial RF signal (DVB-T). ⑭ Power connector (110 - 230 V AC). ⑮ Fuse holder. ⑯ On / Off switch. ⑰ Earth connection. |
|--|---|



WALL MOUNTING

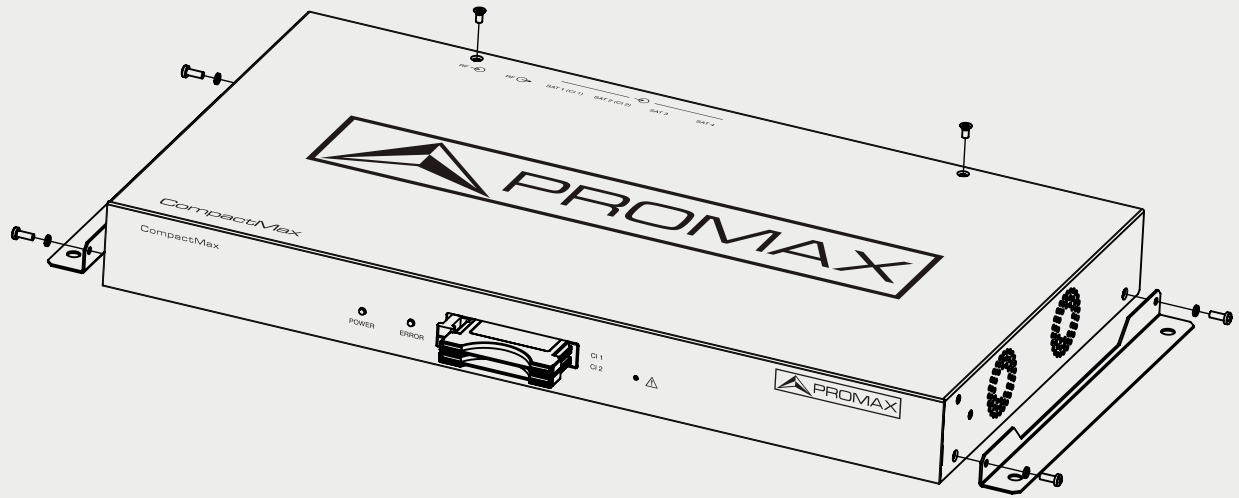

RACK MOUNTING

